

UTILITY  
PATENT APPLICATION  
TRANSMITTAL

Only for new nonprovisional applications under 37 CFR 1.53(b)

Attorney Docket No.

35.C14345

First Named Inventor or Application Identifier

KATSUMI KARASAWA

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☐ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)

2. ☒ Specification Total Pages

3. ☒ Drawing(s) (35 USC 113) Total Sheets

4. ☒ Oath or Declaration Total Pages

a. ☐ Newly executed (original or copy)

b. ☒ Unexecuted for information purposes

c. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 17 completed)  
[Note Box 5 below]

i. ☐ DELETION OF INVENTOR(S)  
Signed Statement attached deleting  
inventor(s) named in the prior application, see  
37 CFR 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (useable if Box 4c is checked)  
The entire disclosure of the prior application, from which a copy of  
the oath or declaration is supplied under Box 4c, is considered as  
being part of the disclosure of the accompanying application and is  
hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)

7. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)

a. ☐ Computer Readable Copy

b. ☐ Paper Copy (identical to computer copy)

c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))

9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)

10. ☐ English Translation Document (if applicable)

11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations

12. ☐ Preliminary Amendment

13. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)

14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application  
Status still proper and desired

15. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)

16. ☐ Other: \_\_\_\_\_

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation

☐ Divisional

☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_\_

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

05514

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	31-20 =	11	X \$ 18.00 =	\$ 198.00
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	7-3 =	4	X \$ 78.00 =	\$ 312.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$ 0.00
				BASIC FEE (37 CFR 1.16(a))	\$ 690.00
			Total of above Calculations =		\$1,200.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL =				\$1,200.00

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.


20. ☒ A check in the amount of \$1,200.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$\_\_\_\_\_ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge any deficiencies in the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

**SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED**

NAME	LEONARD P. DIANA, Reg. No. 29,296
SIGNATURE	
DATE	March 13, 2000

## INFORMATION PROCESSING APPARATUS AND METHOD

### BACKGROUND OF THE INVENTION

#### Field of the Invention

5           The present invention relates to an information processing for converting variable length packet data to fixed length packet data.

#### Related Background Art

10           In recent years, a digital processing system conforming to two standards [International Organization for Standardization/International Electrotechnical Commission (ISO/IEC) 13818-1 to 3] of Moving Picture Experts Group (MPEG) has been standardized as a video transmission system.

15           Fig. 1 is a block diagram showing the transmission-side constitution of a general digital transmission apparatus which conforms to ISO/IEC 13818-1 to 3.

20           In Fig. 1, reference numeral 301 denotes a video encoder for compressing digital video data in conformity with ISO/IEC 13818-2, and 302 denotes an audio encoder for compressing digital audio data in conformity with ISO/IEC 13818-3.

25           Refernce numeral 303 denotes a packetizer for packetizing a video elementary stream outputted from the video encoder 301 in accordance with Packetized Elementary Stream (PES) of ISO/IEC 13818-1, 304 denotes

a packetizer for packetizing an audio elementary stream  
outputted from the audio encoder 302 in accordance with  
PES of ISO/IEC 13818-1, and 305 denotes a TS  
multiplexer for packetizing and multiplexing the video  
5 PES and audio PES outputted respectively from the  
packetizers 303, 304 into a transport stream packet in  
accordance with Transport Stream (TS) of ISO/IEC 13818-  
1.

The operation will next be described.

10 The video data and audio data are inputted to the  
video encoder 301 and audio encoder 302, respectively.  
The video encoder 301 checks information highly  
correlative in space and time in conformity with  
ISO/IEC 13818-2, and performs conversion to data with a  
15 low redundancy to compress the information amount. The  
audio encoder 302 compresses the information amount in  
conformity with ISO/IEC 13818-3.

In a string of these compressed data, a unit which  
can be extended alone is called an access unit (AU),  
20 and the data strings of video AU and audio AU are  
called a video elementary stream (video ES) and an  
audio elementary stream (audio ES), respectively. The  
video ES and audio ES are inputted to the packetizers  
303, 304, respectively, and are packetized (PES) into a  
25 variable length packet together with the stream ID  
indicating the ES attribute and the time stamp  
information indicating decoding time or display time on

a decoding side usually by a unit on the basis of the access unit.

The TS multiplexer 305 receives the video PES and audio PES, performs conversion to the transport stream (TS), and emits an output.

Fig. 2 is a block diagram showing the detailed constitution of the TS multiplexer 305.

In Fig. 2, numeral 306 denotes a memory such as RAM for storing inputted video PES, 307 denotes a memory such as RAM for storing inputted audio PES, and 308 and 309 denote TS packetizers for converting the video and audio PES stored in the memories 306, 307 to the transport stream packet in conformity with ISO/IEC 13818-1.

Numeral 310 denotes a memory for generating and storing the overall auxiliary TS information such as the PID definition described in ISO/IEC 13818-1 as Program Specific Information (PSI), 311 denotes a PCR generator for generating Program Clock Reference (PCR) indicating a reference time which defines a reception time on the decoding side, and 312 denotes a rate converting FIFO for performing rate adjustment in accordance with a transmission line.

The operation of the TS multiplexer 305 for receiving the video PES shown in Fig. 3 by the above-described constitution will be described hereinafter.

The video PES with a code length of 340 bytes per

1 PES as shown in Fig. 3 is inputted and written to the memory 306. Additionally, the start code (packet\_start\_code\_prefix: 0x000001) of the video PES is detected, and the code length of 1 PES is counted.

5           Subsequently, data is transferred to the TS packetizer 308 from the memory 306. The TS packetizer 308 performs packetizing so that the top byte of the video PES is disposed on the top of the payload of the transport stream packet as shown in Fig. 3 based on the  
10           previously measured PES length. Moreover, when the data length is less than 184 bytes as in a second transport stream packet of Fig. 3, an adaptation field is inserted, and then a stuffing byte (0xFF) for adjustment to obtain a unit of 184 bytes is inserted.  
15           Furthermore, the processing operation similar to the above is performed on the audio PES.

          Each data converted to the packet with a fixed length as described above is subjected to rate conversion in the FIFO 312 in accordance with the  
20           transmission line, and outputted as TS. Moreover, the overall auxiliary TS information such as the PID definition is generated as PSI, stored in the memory 310, and packetized to form the TS packet having a predefined PID.

25           The PCR generator 311 generates PCR indicating the reference time which defines the reception time on the decoding side, and multiplexing is performed within a

period of 100 ms in accordance with ISO/IEC 13818-1.

Furthermore, PCR is supplied to each program.

Additionally, since PCR has to be outputted as TS within the period of 100 ms as described above, the PID for PCR is defined in PSI usually separately from the video PES and audio PES, and the packetizing is performed to obtain the TS packet constituted only of the packet header including the PID, and the adaptation field.

10           The TS multiplexer 305 reads the respective TS packets from respective buffers by the unit of TS packet at appropriate timings, and outputs TS. In this case, when there is no effective TS packet corresponding to the fixed rate transmission line, a null packet (stuffing packet, hereinafter referred to also as "stuffing data") defined in ISO/IEC 13818-1 is inserted.

20           In the above-described data multiplexing method in the digital transmission apparatus, the packetizing processing is very complicated, and there is a problem that the hardware amount increases with the increase of programs to be multiplexed.

25           For example, when the audio PES shown in Fig. 3 is converted to the TS packet, the adaptation field is inserted, and the stuffing byte for setting the packet data length to be constant has to be multiplexed. Moreover, a buffer of 1 PES or more has to be provided

to measure the 1 PES length, and the delay amount also increases.

Furthermore, the number of programs to be multiplexed is determined by the hardware configuration of the TS multiplexer. For example, the TS multiplexer 305 of Fig. 2 can transmit only one program, and has to include the memories 306, 307, TS packetizers 308, 309 and PCR generator 311 for the number of programs in order to multiplex a plurality of programs.

In this case, data lines for transmission/reception between each program encoder and TS multiplexer also increase.

#### SUMMARY OF THE INVENTION

In the above-described background, an object of the present invention is to provide an information processing apparatus and method in which a packetizing processing is simplified, delay processings are reduced, and even the increase of programs to be multiplexed can be handled.

To attain the object, according to one aspect of the present invention, there is provided an information processing apparatus/method comprising: inputting variable length packet data including packet length information indicative of a packet length and encoded information data, and identification flag information for identifying the packet length information;

distinguishing the packet length information included  
in the packet data in accordance with the  
identification flag information and judging the packet  
length of the packet data; and generating fixed length  
5 packet data from the variable length packet data in  
accordance with the judgment result and transmitting  
the fixed length packet data.

According to another aspect of the present  
invention, there is provided an information processing  
10 apparatus comprising: encoding means for encoding  
information data, generating variable length packet  
data including packet length information indicative of  
a packet length and generating identification flag  
information for identifying the packet length  
15 information; and converting means for distinguishing  
the packet length information included in the packet  
data in accordance with the identification flag  
information generated by the encoding means, judging  
the packet length of the variable length packet data,  
20 and converting the variable length packet data to fixed  
length packet data. The encoding means is connected to  
the converting means via at least a data bus for  
transmitting the variable length packet data and flag  
bus for transmitting the identification flag  
25 information.

According to further aspect of the present  
invention, there is provided an information processing

apparatus/method comprising: generating variable length  
packet data including encoded information data;  
generating and transmitting fixed length packet data  
from the generated variable length packet data;  
5 generating clock reference information for use in a  
time reference during decoding of the encoded  
information data, wherein in the fixed length packet  
data generation processing, the fixed length packet  
data including the clock reference information is  
10 generated and the generated fixed length packet data is  
transmitted within a predetermined time interval, and  
the fixed length packet data including the clock  
reference information is transmitted when there is no  
effective fixed length packet data.

15 According to still further aspect of the present  
invention, there is provided an information processing  
apparatus/method comprising: generating variable length  
packet data including encoded information data;  
generating and transmitting fixed length packet data  
20 from the generated variable length packet data;  
generating program specific information indicative of  
program specific of the fixed length packet data,  
wherein in the fixed length packet data generation  
processing, the fixed length packet data including the  
25 program specific information is generated and the  
generated fixed length packet data is transmitted  
within a predetermined time interval, and the fixed

length packet data including the program specific information is transmitted when there is no effective fixed length packet data.

Other objects, features and advantages of the invention will become apparent from the following detailed description taken in conjunction with the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing the transmission-side constitution of a general digital transmission apparatus which conforms to ISO/IEC 13818-1 to 3.

Fig. 2 is a block diagram showing the detailed configuration of a TS multiplexer 305.

Fig. 3 is an explanatory view showing a conventional PES/TS conversion format.

Fig. 4 is a block diagram showing the constitution of the present digital transmission apparatus.

Fig. 5 is an explanatory view showing the data structure of a PES packet.

Fig. 6 is comprised of Figs. 6A and 6B are flowcharts showing the operation of the digital transmission apparatus of Fig. 4.

Fig. 7 is an explanatory view showing the present PES/TS conversion format.

Fig. 8 is a block diagram showing the constitution

of the digital transmission apparatus according to the present embodiment.

Fig. 9 is comprised of Figs. 9A and 9B are flowcharts showing the operation of the digital transmission apparatus of Fig. 8.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Embodiments of the present invention will be described hereinafter with reference to the drawings.

In the present embodiment, it will be described as one example that video data encoded by International Telecommunication Union-Telecommunication Standardization Sector (ITU-T) Recommendation H. 222.0: ISO/IEC 13818-2 is system-encoded by ITU-T Recommendation H. 222.0: ISO/IEC 13818-1.

Fig. 4 is a block diagram showing the configuration of a digital transmission apparatus according to the present embodiment.

In Fig. 4, a plurality of digital video data and digital audio data are inputted to program encoders 101, ..., 113 (corresponding to Program 1 to N) defined by ITU-T Recommendation H. 222.0: ISO/IEC 13818-1. The inputted digital video data is compressed by a video encoder 102 in conformity with ITU-T Recommendation H. 222.0: ISO/IEC 13818-2, and outputted as a video elementary stream.

The outputted video elementary stream is inputted

to a packetizer 103. In the packetizer 103, the stream is converted to a packetized elementary stream (PES) indicated in ITU-T Recommendation H. 222.0: ISO/IEC 13818-1. Here, for a packetized information length, in  
5 consideration of the data error of a transmission line, packetizing is performed, for example, for each slice indicated in the ITU-T Recommendation H. 222.0: ISO/IEC 13818-2.

On the other hand, the inputted digital audio data  
10 is compressed by an audio encoder 108 in conformity with the ITU-T Recommendation H. 222.0: ISO/IEC 13818-3, and outputted as an audio elementary stream. The outputted audio elementary stream is inputted to a packetizer 109. In the packetizer 109, the stream is  
15 converted to a packetized elementary stream (PES) indicated in the ITU-T Recommendation H. 222.0: ISO/IEC 13818-1.

Additionally, Fig. 5 shows the data structure of the PES packet. In Fig. 5:

20 packet\_start\_code\_prefix: The packet\_start\_code\_prefix is a 24-bit code. Together with the stream\_id that follows it constitutes a packet start code that identifies the beginning of a packet. The packet\_start\_code\_prefix is the bit string 0x000001.

25 stream\_id: In Program Streams, the stream\_id specifies the type and number of the elementary stream.

PES\_packet\_length: A 16 bit field specifying the number

of bytes in the PES packet following the last byte of  
the field. A value of 0 indicates that the PES packet  
length is neither specified nor bounded and is allowed  
only in PES packets whose payload is a video elementary  
5 stream contained in Transport Stream packets.

Turning back to the description of Fig. 4, the  
video PES and audio PES packetized in the packetizers  
103, 109 are stored in FIFO 104, 110, respectively.  
Moreover, the packetizers 103, 104 generate flag  
10 information which can be identified by the unit of 1  
PES as described later, and store the information  
together with PES in the FIFO 104, 110.

A PCR generator 107 is a counter for generating  
program\_clock\_reference\_base and  
15 program\_clock\_reference\_extension for system  
synchronization indicated in the ITU-T Recommendation  
H. 222.0: ISO/IEC 13818-1. The  
program\_clock\_reference\_base generated in the PCR  
generator 107 is supplied to controllers 105, 111.

20 The controllers 105, 111 control the encoding of  
the video data, the encoding of audio data and the  
packetizing. Moreover, upon receiving  
program\_clock\_reference\_base from the PCR generator  
107, presentation\_time\_stamp indicated in the ITU-T  
25 Recommendation H. 222.0: ISO/IEC 13818-1 is inserted.

The video PES and audio PES accumulated in the  
FIFO 104, 110 are inputted to a TS multiplexer 114 via

a CPU/PES data bus 115. Furthermore, PES  
identification flag information is inputted to the  
multiplexer 114 via a flag bus 116. Additionally, in  
the present embodiment, the CPU/PES data bus 115 has a  
5 width of 16 bits, and the flag bus 116 has a width of  
one bit.

The video PES and audio PES inputted via the  
CPU/PES data bus 115 are written to a RAM 122 via a  
buffer 119, and further supplied to a PES\_length  
10 detector 123. Moreover, the PES identification flag  
information inputted via the flag bus 116 is supplied  
to the PES\_length detector 123.

A CPU 124 reads PES\_packet\_length included in a  
PES header from the detection result of the PES\_length  
15 detector 123, and converts the video PES and audio PES  
written in the RAM 122 to a transport stream packet in  
conformity with the ITU-T Recommendation H. 222.0:  
ISO/IEC 13818-1. The data converted to the transport  
stream packet is transferred to FIFO 128 via a buffer  
20 127 from the RAM 122.

In the FIFO 128, the rate conversion is performed  
in accordance with the transmission line and TS is  
outputted. Moreover, the CPU 124 grasps each program  
state via bi-directional buffers 118, 106, 112 from a  
25 CPU data bus 120, generates PSI indicated in the ITU-T  
Recommendation H. 222.0: ISO/IEC 13818-1, and writes  
PSI to PSI/RAM 126 via a bi-directional buffer 121.

At the above-described rate conversion of the FIFO 128, the CPU 124 performs the multiplexing control of the respective data (video TS, audio TS, PSI, PCR).

A detailed processing operation in the digital transmission apparatus constituted as described above will be described hereinafter with reference to a flowchart of Fig. 6.

First, in step S201, each program state is grasped from the CPU 124 via the CPU data bus 120 and bi-directional buffers 118, 106, 112, parameters, and the like necessary for encoding are supplied in accordance with each state, and the controllers 105, 111 are controlled. The controllers 105, 111 controlled by the CPU 124 control the encoders 102, 108, respectively.

Subsequently, in step S202, the PSI is generated in accordance with each program state grasped in the step S201, and written to the PSI/RAM 126 from the CPU 124 via the CPU data bus 120 and bi-directional buffer 121. In step S203, the pattern of data "0xFF" (stuffing bytes) is written to all areas for use of the RAM 122 from the CPU 124.

In step S204, the CPU 124 reads the storage amount (FIFO 104, 110) of each video packetized elementary stream and audio packetized elementary stream via the CPU data bus 120 and bi-directional buffers 118, 106, 112. Here, the controllers 105, 111 have a function of monitoring the writing amount to the FIFO 104, 110 from

the packetizers 103, 109.

In step S205, the FIFO having the most storage amount is selected from the read FIFO having the storage amounts which exceed a given value. For example, supposing that the FIFO 104 is selected, in the next step S206 the CPU 124 transmits a command to the controller 105 via the CPU data bus 120 and bi-directional buffers 118, 106 to read three words of stored data of the FIFO 104. The controller 105 receives this read command, and outputs the number of data designated by the FIFO 104 to the CPU/PES data bus 115. Moreover, the same number of PES identification flags are outputted to the flag bus 116.

The video PES and PES identification flag information accumulated in the FIFO 104 in this case are shown in Fig. 7.

In step S206, three words (0x0000, 0x01E0, 0x009A) of the video PES shown in Fig. 7 are supplied to the buffer 119 and PES\_length detector 123, and the PES identification flags (1, 1, 1) for the three words are supplied to the PES\_length detector 123.

In step S207, the PES\_length detector 123 holds, from the supplied PES identification flags, PES\_packet\_length (0x009A in Fig. 7) which is the code length of the video PES, and the CPU 124 reads this code length.

In step S208, the amount of information read from

the FIFO 104 is calculated from the PES code length read by the CPU 124.

In Fig. 7, since the PES code length is 160 bytes, and the information of three words (6 bytes) are  
5 already read, the remaining number of data is 154 bytes (77 words). Since the payload length of the transport stream packet is 184 bytes (92 words) at maximum, all the 77 words of the remaining PES data can be multiplexed, and the insertion of the adaptation field  
10 for 12 words (= 92 words - (77+3) words) is necessary.

In step S209, from the calculation result of the step S208, one word in total of TS-SYNC (4 bytes) and adaptation\_field\_length and its annexed flag  
15 information (1 byte) of the adaptation field (12 words) excluding the stuffing byte is written to the RAM 122 from the CPU 124 via the bi-directional buffer 121. Here, the stuffing byte in the adaptation field becomes unnecessary by the RAM initialization of the step S203. Moreover, the PES data (3 words) held in the buffer 119  
20 in the step S206 are written to the RAM 122.

In step S210, the CPU 124 transmits the read command for 77 words of the stored data of the FIFO 104 to the controller 105 via the bi-directional buffers 118, 106. The controller 105 receives this read  
25 command, outputs the data for 77 words to the CPU/PES data bus 115 from the FIFO 104, and additionally outputs the same number of PES identification flags to

the flag bus 116. In this case, the CPU 124 designates a writing address and writes the data for 77 words inputted via the CPU/PES data bus into the RAM 122 via the buffer 119.

5           Until the above-described step S210, one transport stream packet is completed.

            Subsequently, in step S211, the CPU 124 checks the PSI transmission period defined in the ITU-T Recommendation H. 222.0: ISO/IEC 13818-1. If the  
10           multiplexing is necessary, in step S212, PSI\_packet is transferred to the FIFO 128 from the PSI/RAM 126. If not, in step S213, the PCR transmission period defined in the ITU-T Recommendation H. 222.0: ISO/IEC 13818-1 is checked. When the multiplexing is necessary, in  
15           step S214 the PCR value is sent to PCR bus 117 from the PCR generator 107 via the bi-directional buffers 118, 106, and transferred to the FIFO 128 via a buffer 125.

            Conversely, when it is still not time to multiplex, it is determined in step S215 whether the  
20           transport stream packet effective for the RAM 122 is present. When the packet is present, in step S216 the data of the RAM 122 is transferred to the FIFO 128 via the buffer 127. After the data of the RAM 122 is transferred, the data "0xFF" (stuffing byte) is written  
25           to the RAM 122 from the CPU 124 via the bi-directional buffer 121, and the RAM is again initialized.

            When there is no transport stream packet effective

for the RAM 122, in step S217 Null\_packet conforming to the ITU-T Recommendation H-222.0: ISO/IEC 13818-1 is written to the FIFO 128. After the above-described step is performed, the process returns to the step  
5 S204, thereby repeating the same operation.

As described above, according to the present embodiment, by adding the flag whose code length can be identified as the auxiliary information to the video PES which is a variable length packet, the code length  
10 of the variable length can easily be detected. During the transport stream packetizing, since the reading from each buffer is controlled in accordance with the code length, the efficient packetizing can be performed.

Moreover, the increase of programs to be multiplexed can easily be processed without increasing hardware circuits. Furthermore, the data wiring for transmission/reception between a plurality of encoders and multiplexers does not have to be increased.  
15

Another embodiment will next be described.  
20

In this embodiment, the TS multiplexer 114 of Fig. 4 is changed to the constitution of a TS multiplexer 114' shown in Fig. 8, and the other constitutions are the same as those of Fig. 4. Additionally, in Fig. 8  
25 the same parts as those of Fig. 4 are denoted with the same reference numerals, and the description thereof is omitted.

In the present embodiment, a PCR timer 201 and a PSI timer 202 are newly disposed.

The PCR timer 201 counts the periods of  
program\_clock\_reference\_base and  
5 program\_clock\_reference\_extension (multiplexed elapse  
time). Moreover, the PSI timer 202 counts the period  
of PSI (multiplexed elapse time).

A CPU 124' controls the multiplexing based on  
outputs of the PCR timer 201 and PSI timer 202, and  
10 feedback-controls the PCR timer 201 and PSI timer 202.

A detailed processing operation in the digital  
transmission apparatus constituted as described above  
will be described hereinafter with reference to a  
flowchart of Fig. 9. Additionally, in Fig. 9 the  
15 processing similar to that of Fig. 6 is denoted with  
the same step numeral, and the description thereof is  
omitted.

First, in step S201', each program state is  
grasped from the CPU 124 via the CPU data bus 120 and  
20 bi-directional buffers 118, 106, 112, parameters, and  
the like necessary for encoding are supplied in  
accordance with each state, and the controllers 105,  
111 are controlled. The controllers 105, 111  
controlled by the CPU 124 control the encoders 102,  
25 108, respectively. Furthermore, the PCR timer 201 and  
PSI timer 202 are reset. After the PCR timer 201 and  
PSI timer 202 are reset, they operate in real time.

In step S303, the value of the PCR timer 201 is read, and compared with a predetermined value. Here, the predetermined value is obtained by subtracting the time for transmitting 188 bytes for one transport stream packet from 100 ms which is the upper limit of the transmission cycle of the PCR field defined in the ITU-T Recommendation H. 222.0: ISO/IEC 13818-1, and it is determined whether or not the value of the PCR timer 201 exceeds this predetermined value.

As a result of the determination, if the value exceeds the predetermined value, the process advances to step S304. If not, the process advances to step S306.

In the step S304, when the value of the PCR timer 201 exceeds the predetermined value as the result of the determination of the step S303, the PCR value is transmitted to the PCR bus 117 from the PCR generator 107 via the bi-directional buffers 118, 106, and transferred to the FIFO 128 via the buffer 125, and the PCR packet is outputted.

After the PCR packet is outputted in the step S304, in step S305 the PCR timer 201 is reset. Then, after turning back to the step S204, the subsequent processing steps are repeatedly executed.

In step S306, when the value of the PCR timer 201 does not exceed the predetermined value as the determination result of the step S303, the value of the

PSI timer 202 is read, and compared with the predetermined value. Here, by considering an image restoring time during decoding the predetermined value is set to a value obtained by subtracting time to  
5 transmit 188 bytes for one transport stream packet from 500 ms, and it is determined whether or not this predetermined value exceeds the value of the PSI timer 202.

When the value exceeds the predetermined value as  
10 the determination result, the process advances to step S307. If not, the process advances to step S309.

In the step S307, when the value of the PSI timer 202 exceeds the predetermined value as the determination result of the step S306, PSI\_packet is  
15 transferred to the FIFO 128 from the PSI/RAM 126, and a PSI packet is outputted.

After the PSI packet is outputted in the step S307, in step S308 the PSI timer 202 is reset. Then, after turning back to the step S204, the subsequent  
20 processing steps are repeatedly executed.

In step S309, when the value of the PCI timer 202 does not exceed the predetermined value as the determination result of the step S306, it is determined whether the transport stream packet effective for the  
25 RAM 122 is present. When the packet is present, the process advances to step S310. If not, the process advances to step S311.

In the step S310, when the transport stream packet effective for the RAM 122 is present, the data of the RAM 122 is transferred to the FIFO 128 via the buffer 127. After the data of the RAM 122 is transferred, the data "0xFF" (stuffing byte) is written to the RAM 122 from the CPU 124 via the bi-directional buffer 121, and the RAM is again initialized. Subsequently, after returning to the step S204, the subsequent processing steps are repeatedly executed.

10 In the step S311, when there is no video transport stream packet effective for a multiplexing buffer 204 as the determination result of step S309, the value of the PCR timer 201 read in the step S303 is compared with the value of the PSI timer 202 read in the step S306, and it is determined whether or not the value of the PCR timer 201 exceeds the value of the PSI timer 202.

When the value of the PCR timer 201 exceeds the value of the PSI timer 202 as the determination result, the process advances to step S312. If not, the process advances to step S314.

25 In the step S312, when the value of the PCR timer 201 exceeds the value of the PSI timer 202 as the determination result of the step S311, the PCR value is transmitted to the PCR bus 117 from the PCR generator 107 via the bi-directional buffers 118, 106, and transferred to the FIFO 128 via the buffer 125, and the

PCR packet is outputted.

After the PCR packet is outputted in the step S312, in step S313 the PCR timer 201 is reset. Then, after returning to the step S204, the subsequent  
5 processing steps are repeatedly executed.

In the step S314, when the value of the PCR timer 201 does not exceed the value of the PSI timer 202 as the determination result of the step S311, PSI\_packet is transmitted to the FIFO 128 from the PSI/RAM 126,  
10 and the PSI packet is outputted.

After the PSI packet is outputted in the step S314, in step S315 the PSI timer 202 is reset. Then, after returning to the step S204, the subsequent processing steps are repeatedly executed.

15 By executing the above-described processing steps, no wasteful stuffing packet for attaining a fixed rate is inserted when the variable length video PES is multiplexed with the fixed length transport stream packet. Even before reaching the defined insertion  
20 cycle, the PCR packet or the PSI packet is inserted, so that the wasteful stuffing can be eliminated.

Specifically, in the present embodiment, since PCR and PSI are multiplexed in accordance with the generated amount of variable length encoded data, no  
25 wasteful information is transmitted onto the transmission line. Therefore, the data transmission can efficiently be performed.

Moreover, the PCR multiplexing period is variable, and transmission errors can effectively be solved. Furthermore, since the PSI multiplexing period is also variable, the image restoring time can be shortened.

5       As the number of programs to be multiplexed increases, the above-described effect increases, so that according to the present embodiment, the efficient data transmission can be performed by effectively utilizing the transmission line.

10       Additionally, the present invention is not limited to the apparatus of the above-described embodiment, and can be applied to a system constituted of a plurality of apparatuses (e.g., a host computer, an interface apparatus, and the like), or to an equipment  
15       constituted of one apparatus (e.g., a digital VTR, a digital video camera, and the like).

          Moreover, to realize the function in the above-described embodiment, the program code of software for realizing the function of the above-described  
20       embodiment is supplied to the apparatus connected to various devices so as to operate the devices or the computer in the system, and the system or apparatus computer (CPU, MPU, and the like) operates the devices according to the supplied program code. This  
25       embodiment is also included in the present invention. In this case, the program code itself of the software realizes the function in the above-described

embodiment, and the present invention is constituted by the program code itself, and means for supplying the program code to the computer, such as the storage medium in which the program code is stored.

5           As the storage medium for storing the program code, for example, a floppy disk, a hard disk, an optical disk, an optical magnetic disk, a CD-ROM, a CD-R, a magnetic tape, a nonvolatile memory card, a ROM, and the like can be used.

10           Moreover, not only when the function of the above-described embodiment is realized by executing the supplied program code by the computer, but also when the program code realizes the function in the above-described embodiment in cooperation with the operating  
15           system (OS) operating in the computer, or other applications, such program code is of course included in the present invention.

          Furthermore, after the supplied program code is stored in the memory disposed in the function expansion  
20           board of the computer or the function expansion unit connected to the computer, the CPU, and the like disposed in the function expansion board and function expansion unit perform a part or the whole of the actual processing based on the instruction of the  
25           program code, and the function of the above-described embodiment is realized by the processing. This case is also included in the present invention.

In other words, the foregoing description of embodiments has been given for illustrative purposes only and not to be construed as imposing any limitation in every respect.

5           The scope of the invention is, therefore, to be determined solely by the following claims and not limited by the text of the specifications and alternations made within a scope equivalent to the scope of the claims fall within the true spirit and  
10       scope of the invention.

WHAT IS CLAIMED IS:

1. An information processing apparatus  
comprising:

5 a) input means for inputting variable length  
packet data including packet length information  
indicative of a packet length and encoded information  
data, and identification flag information for  
identifying said packet length information;

10 b) judgment means for distinguishing the packet  
length information included in said packet data in  
accordance with said identification flag information,  
and judging the packet length of said packet data;

15 c) packet generating means for generating said  
variable length packet data into fixed length packet  
data in accordance with an output of said judgment  
means, and transmitting the fixed length packet data.

2. An apparatus according to claim 1, further  
comprising:

20 clock reference information generating means for  
generating clock reference information for use in a  
time reference during decoding of said encoded  
information data,

25 wherein said packet generating means transmits at  
least one fixed length packet data provided with the  
clock reference information generated by said clock  
reference information generating means within a

predetermined time interval.

3. An apparatus according to claim 2, further comprising:

5        program specific information generating means for generating program specific information indicative of a program specific of a packet to be transmitted,

         wherein said packet generating means transmits at least one fixed length packet data provided with the  
10       program specific information generated by said program specific information generating means within the predetermined time interval.

4. An apparatus according to claim 1, wherein  
15       said input means inputs a plurality of types of variable length packet data.

5. An apparatus according to claim 2, wherein  
         said packet generating means transmits the fixed length  
20       packet data provided with said clock reference information, when no effective fixed length packet data is present.

6. An apparatus according to claim 3, wherein  
25       said packet generating means transmits the fixed length packet data provided with said program specific information, when no effective fixed length packet data

is present.

7. An apparatus according to claim 1, wherein  
said variable length packet data is Packetized  
5 Elementary Stream (PES) conforming to ISO/IEC 13818-1,  
and said fixed length packet data is Transport Stream  
(TS) conforming to ISO/IEC 13818-1.

8. An apparatus according to claim 2, wherein  
10 said clock reference information is Program Clock  
Reference (PCR) conforming to ISO/IEC 13818-1.

9. An apparatus according to claim 2, wherein  
said program specific information is Program Specific  
15 Information (PSI) conforming to ISO/IEC 13818-1.

10. An apparatus according to claim 7, wherein  
said information data is image data, and is encoded in  
conformity with ISO/IEC 13818-2.

20

11. An apparatus according to claim 1, wherein  
said packet generating means inserts a stuffing byte  
when the code length of said variable length packet  
data is less than the code length which can be inserted  
25 to said fixed length packet data.

12. An information processing apparatus

comprising:

a) encoding means for encoding information data,  
generating variable length packet data including packet  
length information indicative of a packet length and  
5 generating identification flag information for  
identifying said packet length information; and

b) converting means for distinguishing the packet  
length information included in said packet data in  
accordance with the identification flag information  
10 generated by said encoding means, judging the packet  
length of said variable length packet data, and  
converting said variable length packet data to fixed  
length packet data,

wherein said encoding means is connected to said  
15 converting means via at least a data bus for  
transmitting said variable length packet data and a  
flag bus for transmitting said identification flag  
information.

20 13. An apparatus according to claim 12, wherein  
said encoding means comprises clock reference  
information generating means for generating clock  
reference information for use in a time reference  
during decoding of said encoded information data, and  
25 said encoding means is connected to said converting  
means via a clock reference bus for transmitting said  
clock reference information.

14. An apparatus according to claim 12, wherein said converting means is connected to a plurality of said encoding means via said data bus and said flag bus which are common.

5

15. An apparatus according to claim 12, wherein said variable length packet data is Packetized Elementary Stream (PES) conforming to ISO/IEC 13818-1, and said fixed length packet data is Transport Stream (TS) conforming to ISO/IEC 13818-1.

10

16. An apparatus according to claim 13, wherein said clock reference information is Program Clock Reference (PCR) conforming to ISO/IEC 13818-1.

15

17. An apparatus according to claim 12, wherein said information data is image data, and is encoded in conformity with ISO/IEC 13818-2.

20

18. An information processing apparatus comprising:

a) first generating means for generating variable length packet data including encoded information data;

b) second generating means for generating and transmitting fixed length packet data from said variable length packet data generated by said first generating means; and

25

c) generating means for generating clock reference information for use in a time reference during decoding of said encoded information data,

5 wherein said second generating means generates the fixed length packet data including said clock reference information and transmits the fixed length packet data within a predetermined time interval, and transmits the fixed length packet data including said clock reference information when there is no effective fixed length  
10 packet data.

19. An apparatus according to claim 18, wherein said variable length packet data is Packetized Elementary Stream (PES) conforming to ISO/IEC 13818-1,  
15 and said fixed length packet data is Transport Stream (TS) conforming to ISO/IEC 13818-1.

20. An apparatus according to claim 18, wherein said clock reference information is Program Clock  
20 Reference (PCR) conforming to ISO/IEC 13818-1.

21. An apparatus according to claim 18, wherein said information data is image data, and is encoded in conformity with ISO/IEC 13818-2.  
25

22. An information processing apparatus comprising:

a) first generating means for generating variable length packet data including encoded information data;

b) second generating means for generating and transmitting fixed length packet data from said variable length packet data generated by said first generating means; and

c) generating means for generating program specific information indicative of a program specific of said fixed length packet data,

10 wherein said second generating means generates the fixed length packet data including said program specific information and transmits the fixed length packet data within a predetermined time interval, and transmits the fixed length packet data including said program specific information when there is no effective  
15 fixed length packet data.

23. An apparatus according to claim 22, wherein said variable length packet data is Packetized  
20 Elementary Stream (PES) conforming to ISO/IEC 13818-1, and said fixed length packet data is Transport Stream (TS) conforming to ISO/IEC 13818-1.

24. An apparatus according to claim 22, wherein  
25 said program specific information is Program Specific Information (PSI) conforming to ISO/IEC 13818-1.

25. An apparatus according to claim 22, wherein said information data is image data, and is encoded in conformity with ISO/IEC 13818-2.

5           26. An information processing method comprising the steps of:

          inputting variable length packet data including packet length information indicative of a packet length and encoded information data, and identification flag  
10 information for identifying said packet length information;

          distinguishing the packet length information included in said packet data in accordance with said identification flag information, and judging the packet  
15 length of said packet data; and

          generating said variable length packet data into fixed length packet data in accordance with said judgment result and transmitting the fixed length packet data.

20

27. An information processing method comprising the steps of:

          generating variable length packet data including encoded information data;  
25           generating and transmitting fixed length packet data from said generated variable length packet data; and

generating clock reference information for use in  
a time reference during decoding of said encoded  
information data,

wherein said fixed length packet generating step  
5 includes a step of generating the fixed length packet  
data including said clock reference information and  
transmitting the fixed length packet data within a  
predetermined time interval, and a step of transmitting  
the fixed length packet data including said clock  
10 reference information when there is no effective fixed  
length packet data.

28. An information processing method comprising  
the steps of:

15 generating variable length packet data including  
encoded information data;

generating and transmitting fixed length packet  
data from said generated variable length packet data;  
and

20 generating program specific information indicative  
of a program specific of said fixed length packet data,  
wherein said fixed length packet data generating  
step includes a step of generating the fixed length  
packet data including said program specific information  
25 and a step of transmitting the fixed length packet data  
within a predetermined time interval, and a step of  
transmitting the fixed length packet data including

said program specific information when there is no effective fixed length packet data.

29. A storage medium in which an information  
5 processing program according to claim 26 is stored and  
which can be read by a computer.

30. A storage medium in which an information  
processing program according to claim 27 is stored and  
10 which can be read by a computer.

31. A storage medium in which an information processing program according to claim 28 is stored and which can be read by a computer.

ABSTRACT OF THE DISCLOSURE

There is disclosed an information processing apparatus/method comprises inputting variable length packet data including packet length information  
5 indicative of a packet length and encoded information data, and identification flag information for identifying the packet length information, distinguishing the packet length information included in the packet data in accordance with the  
10 identification flag information and judging the packet length of the packet data, and generating the variable length packet data into fixed length packet data in accordance with the judgment result and transmitting the fixed length packet data.

15

001120" 9909500

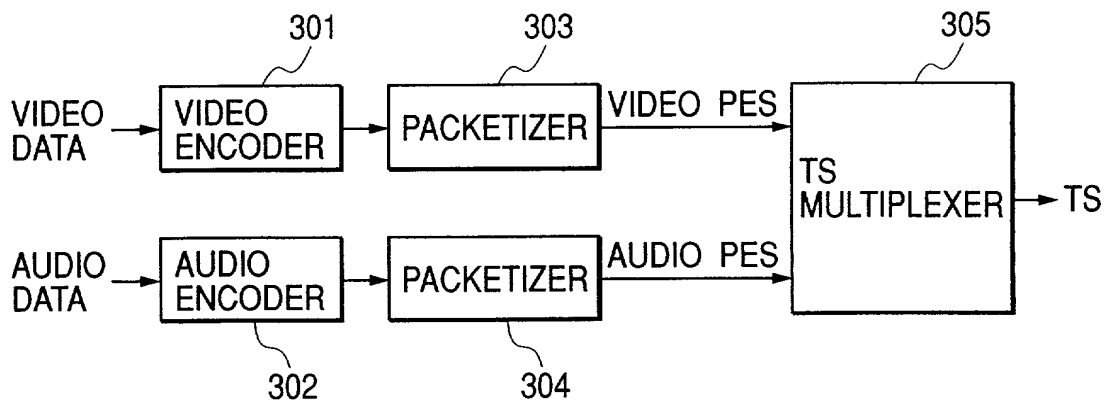
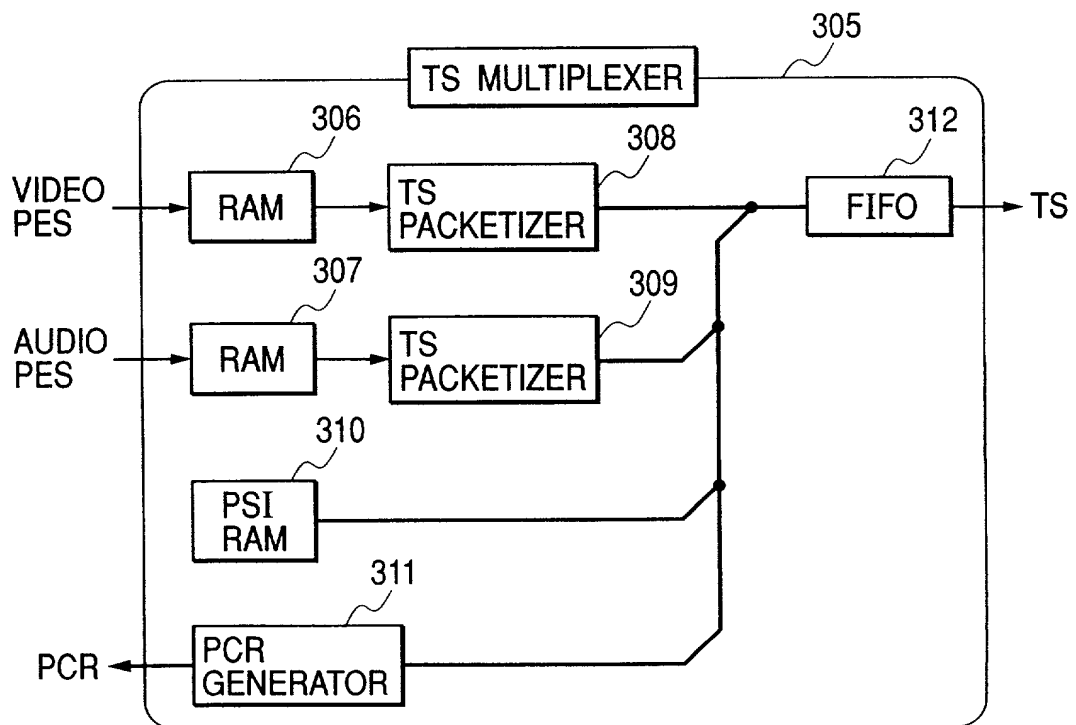
*FIG. 1**FIG. 2*

FIG. 3

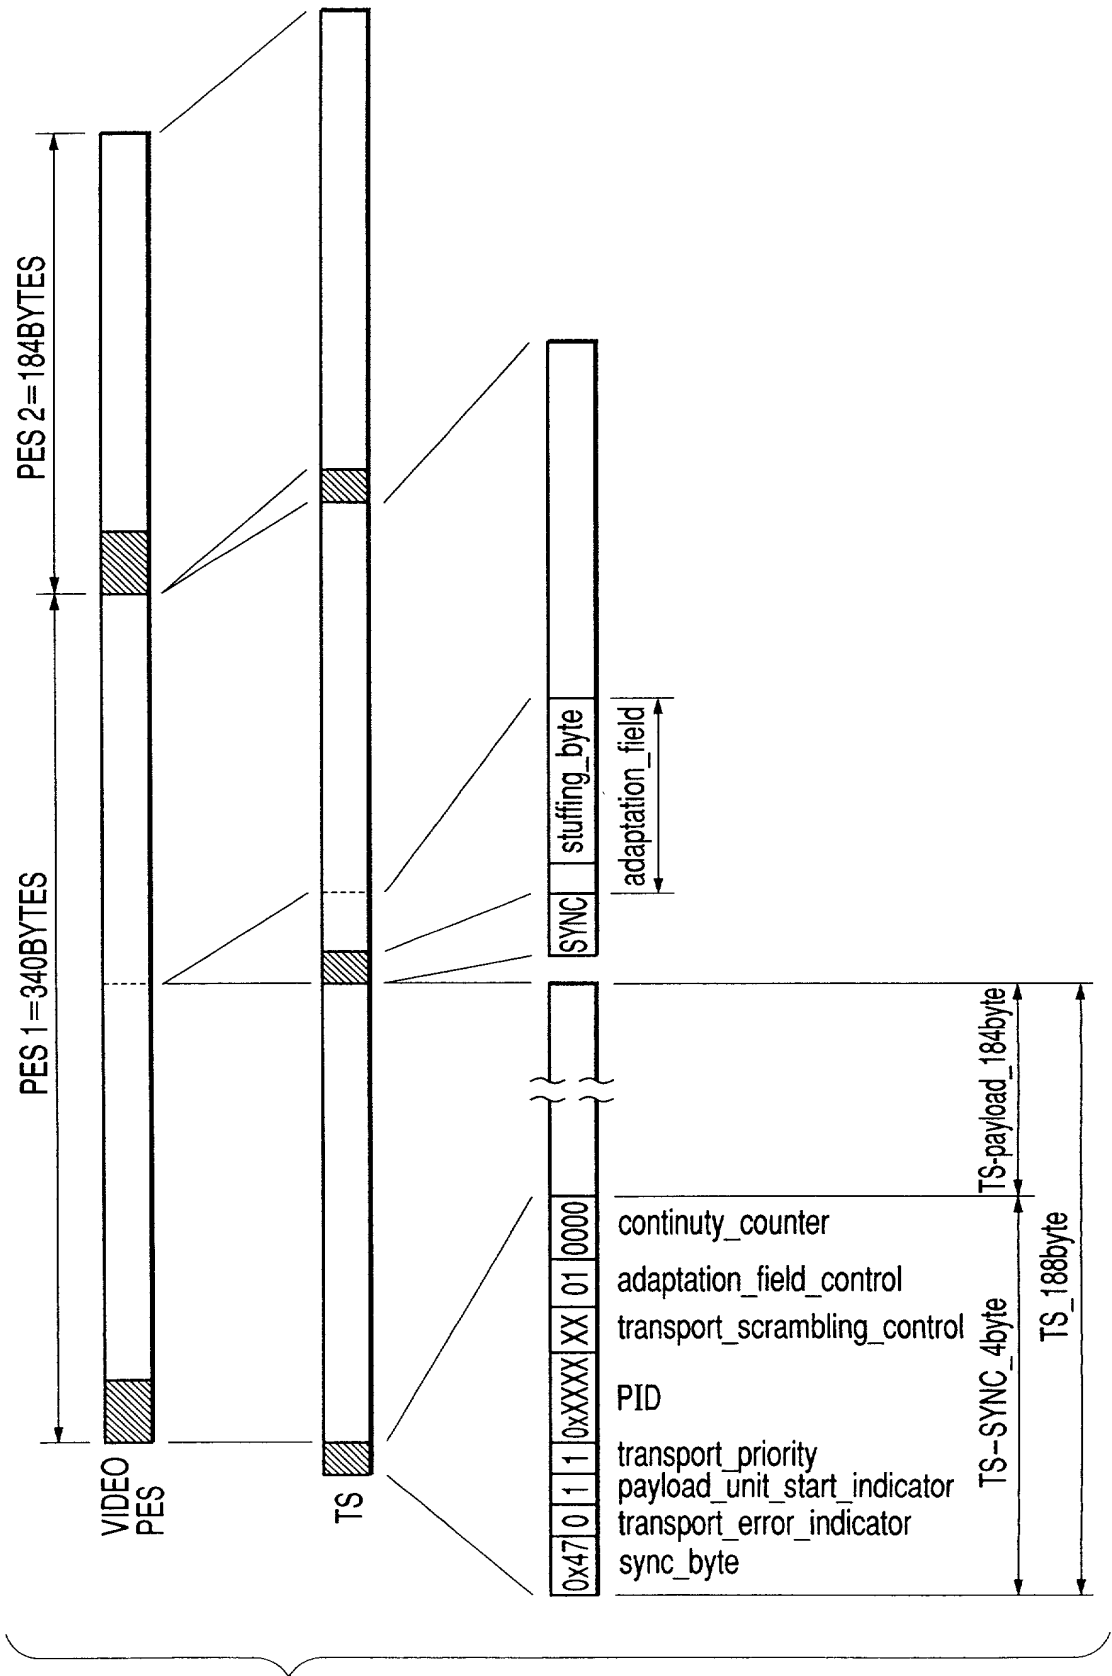


FIG. 4

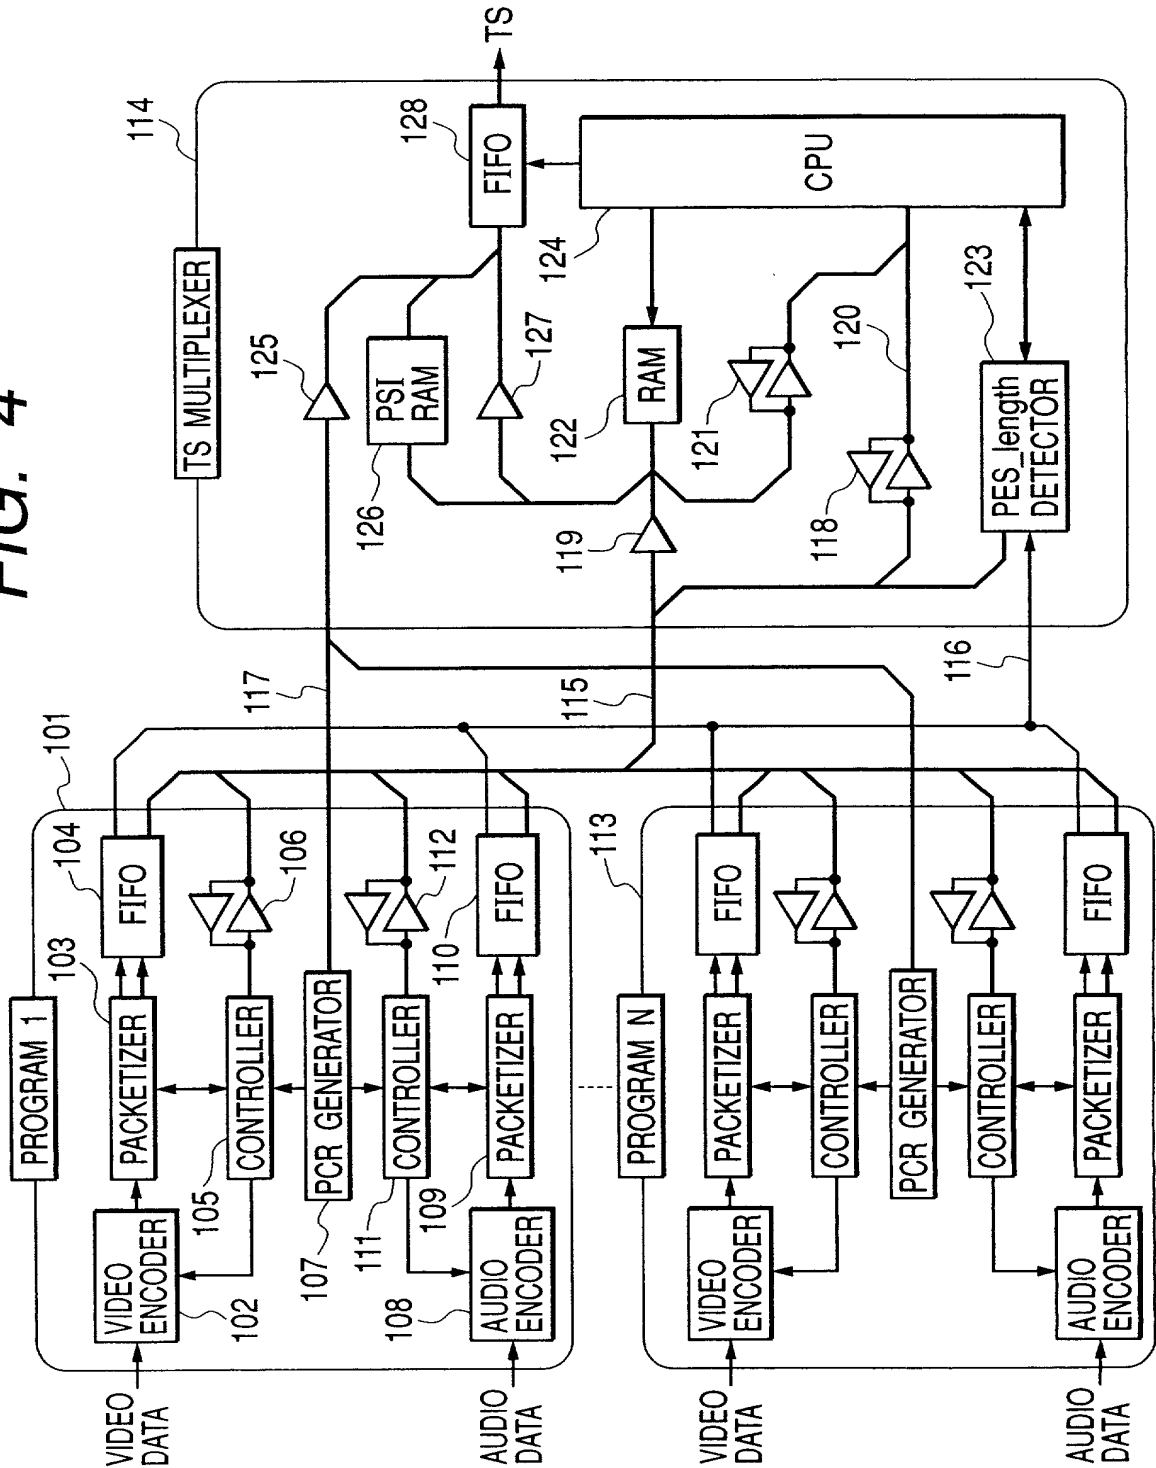
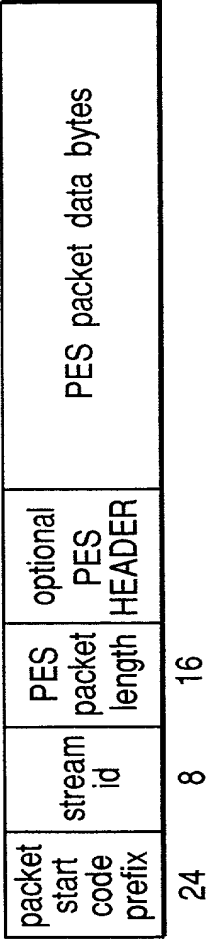


FIG. 5



**FIG. 6****FIG. 6A**

FIG. 6A

FIG. 6B

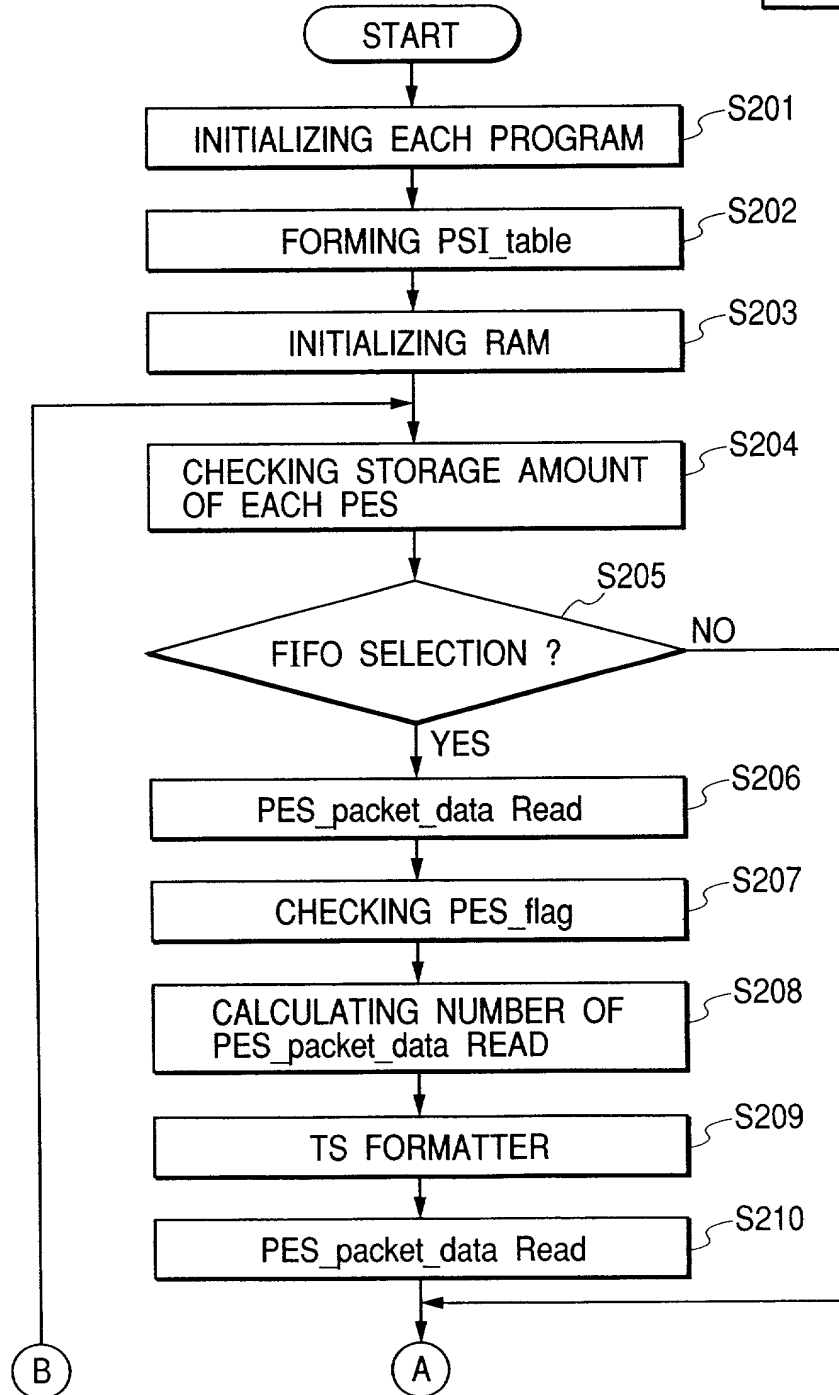


FIG. 6B

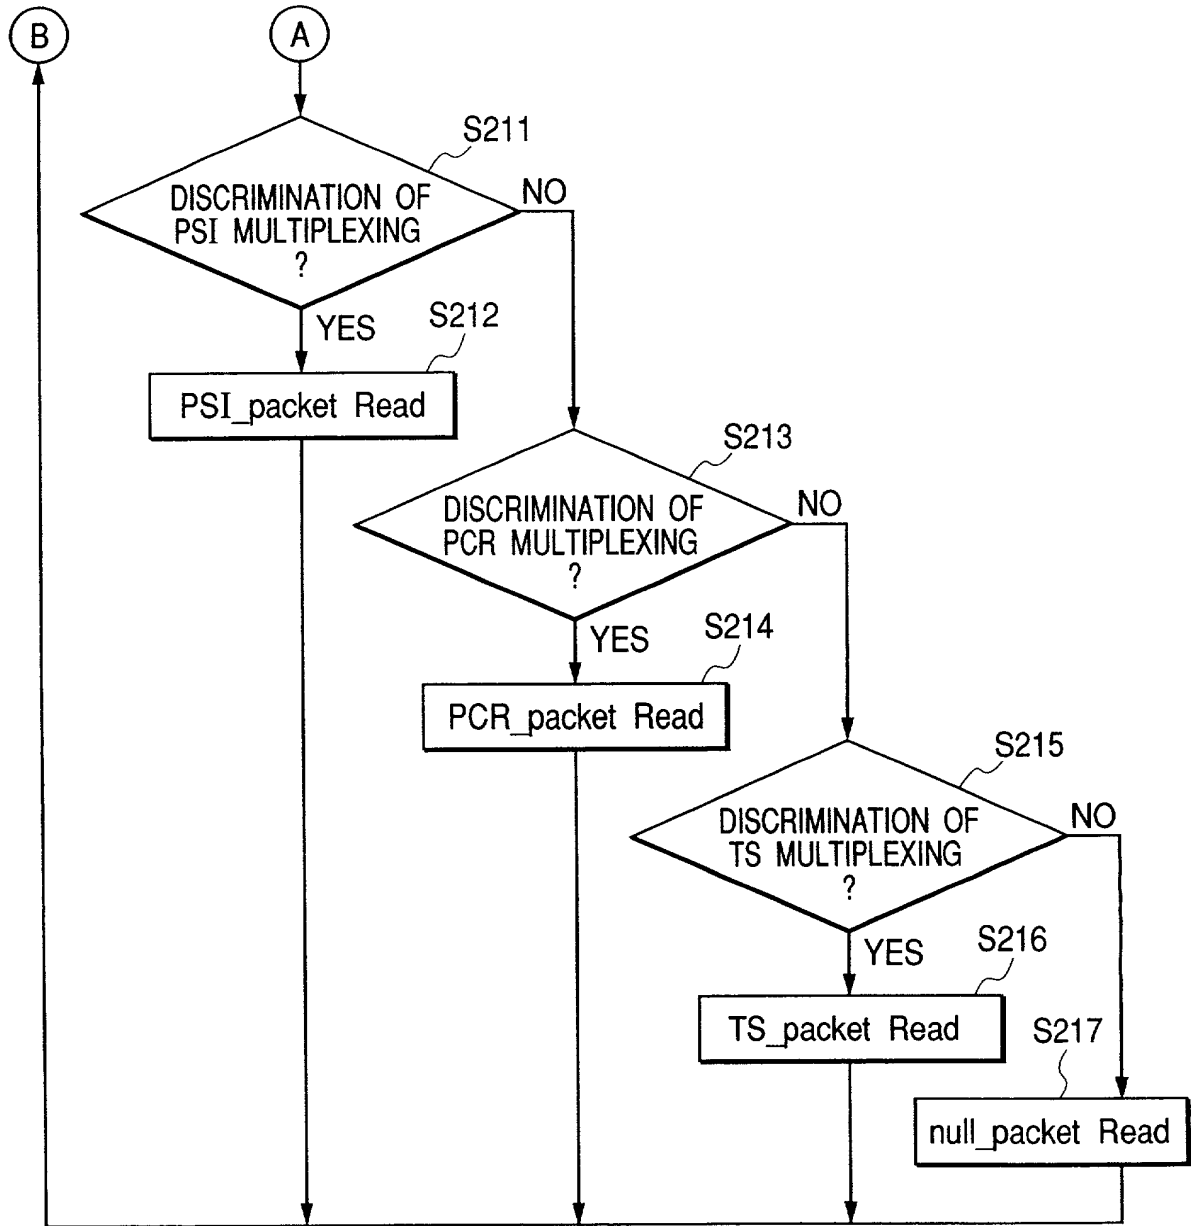


FIG. 7

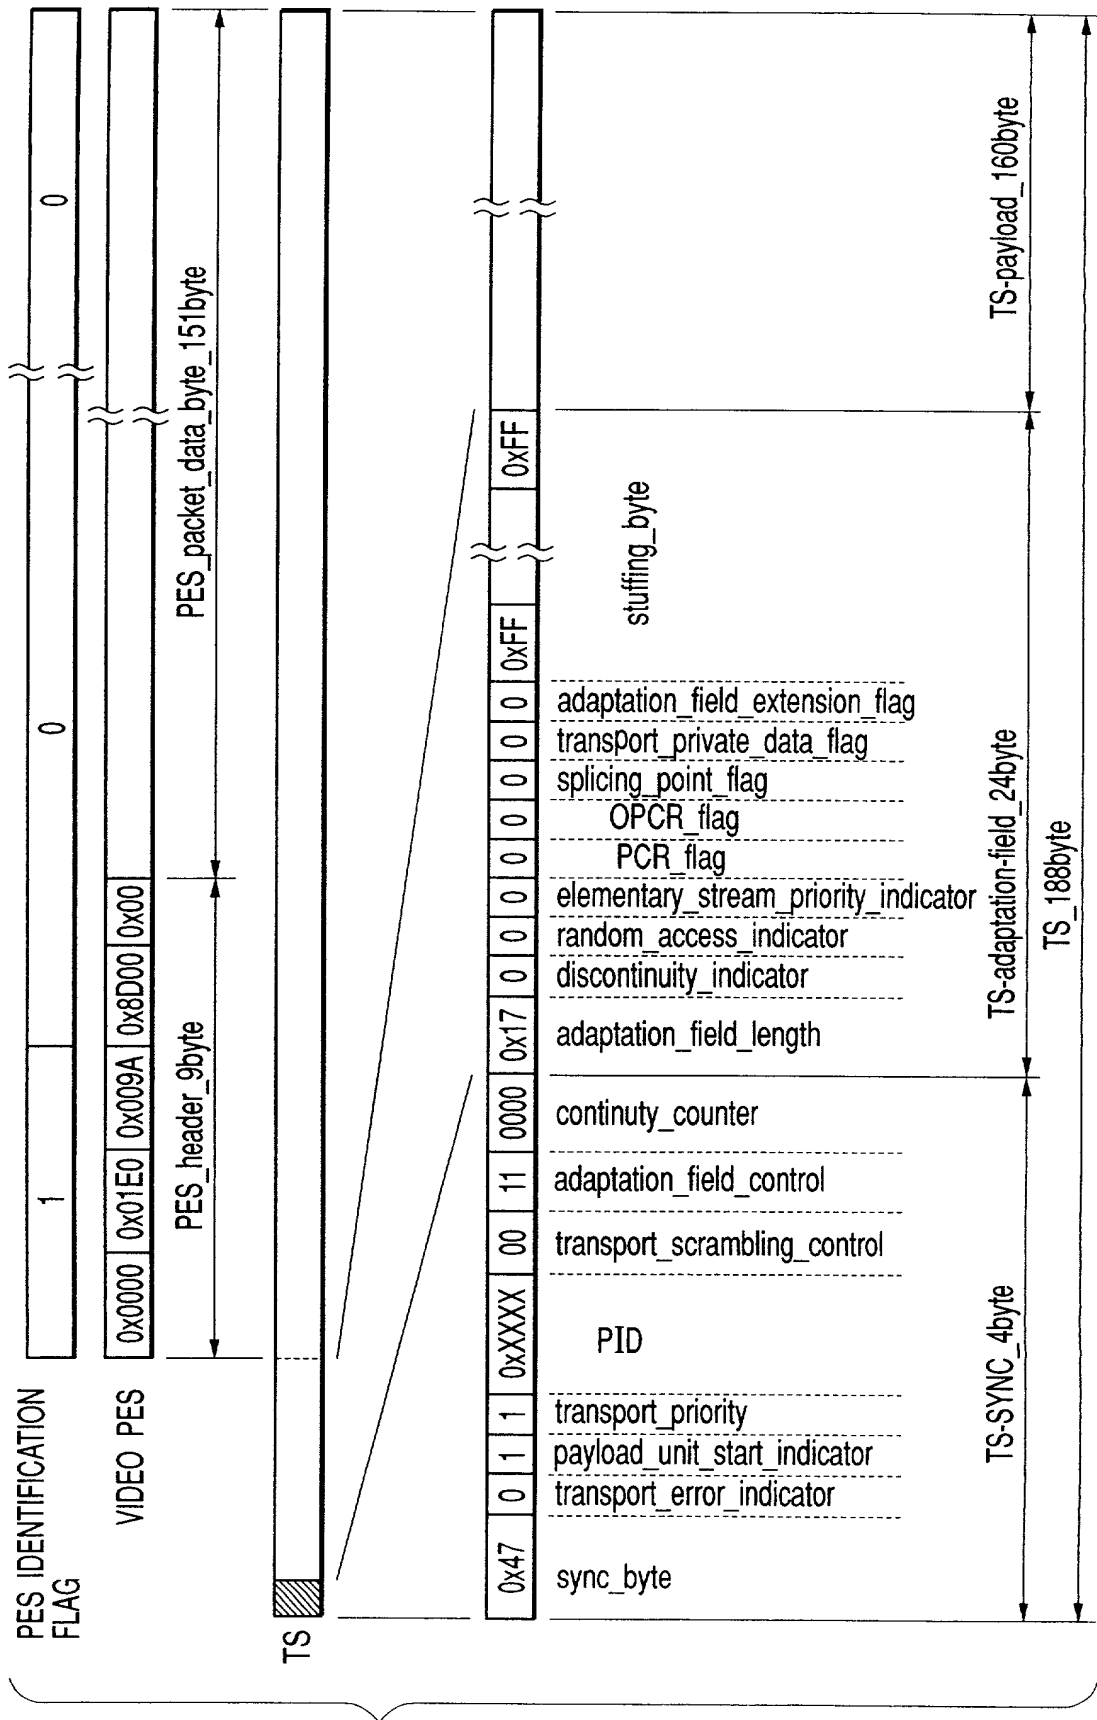
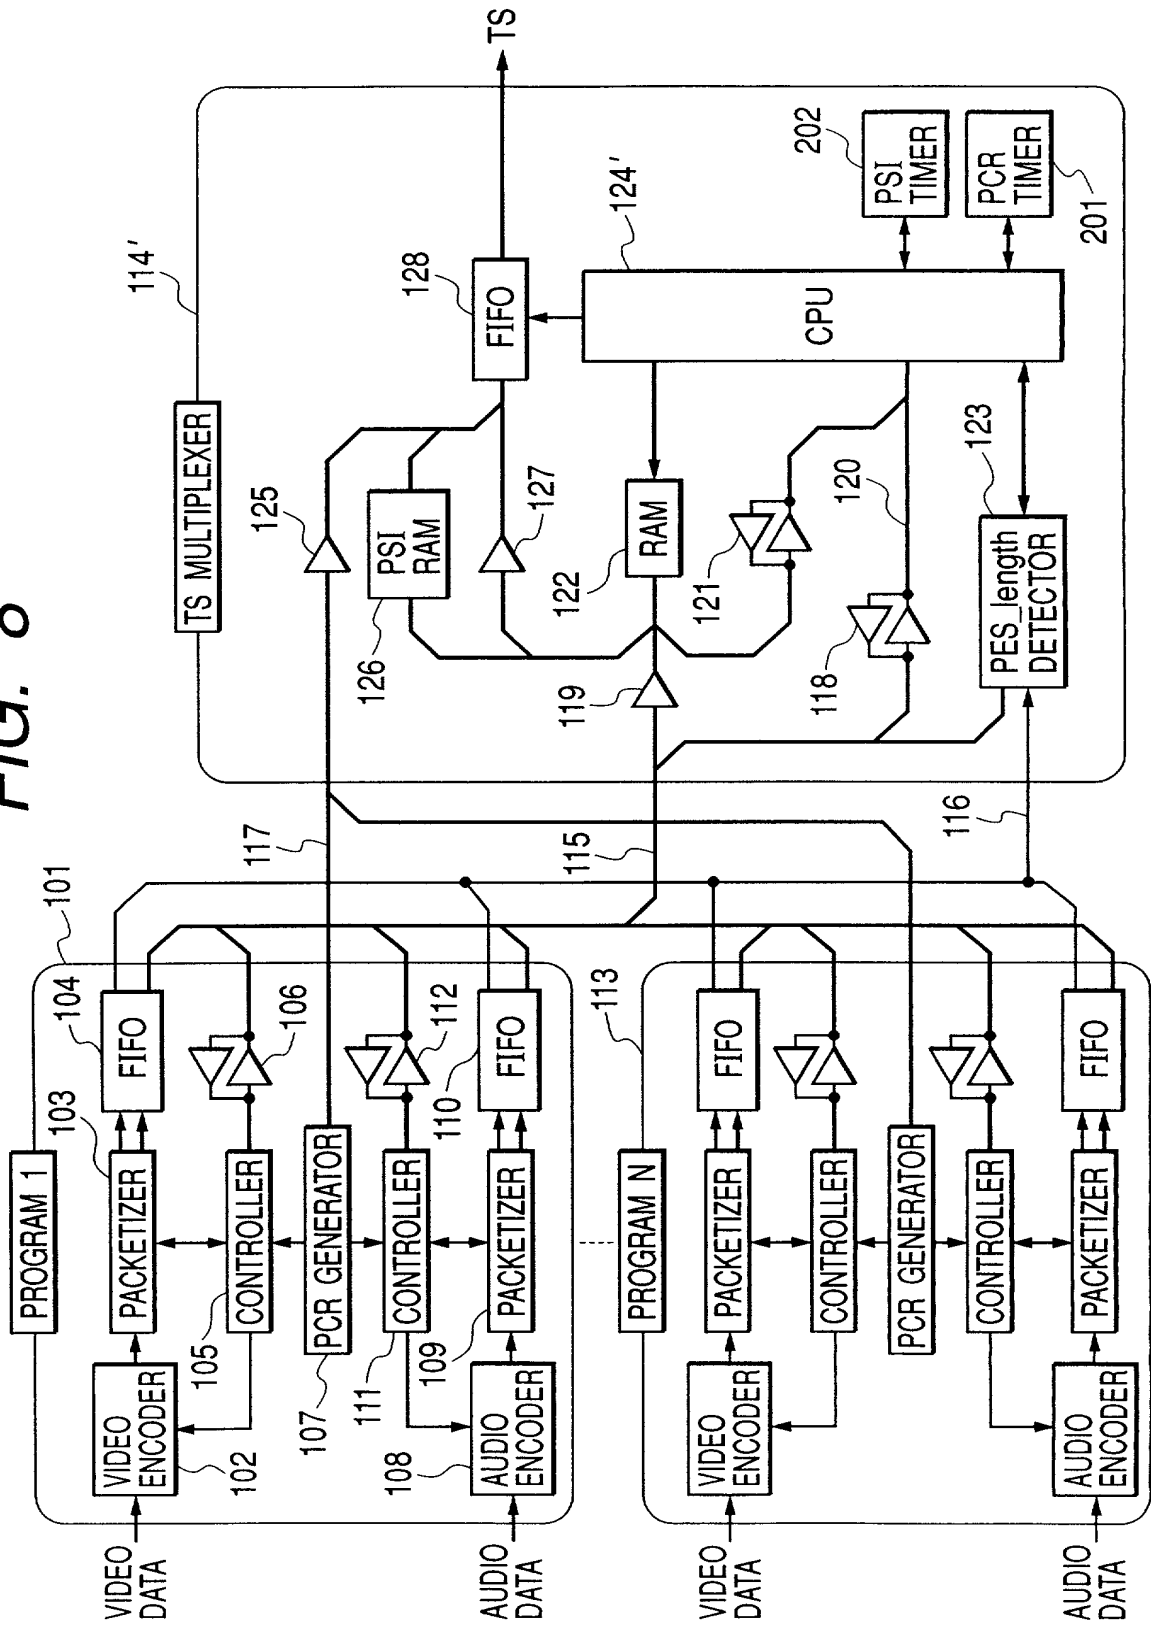


FIG. 8



**FIG. 9****FIG. 9A**

FIG. 9A

FIG. 9B


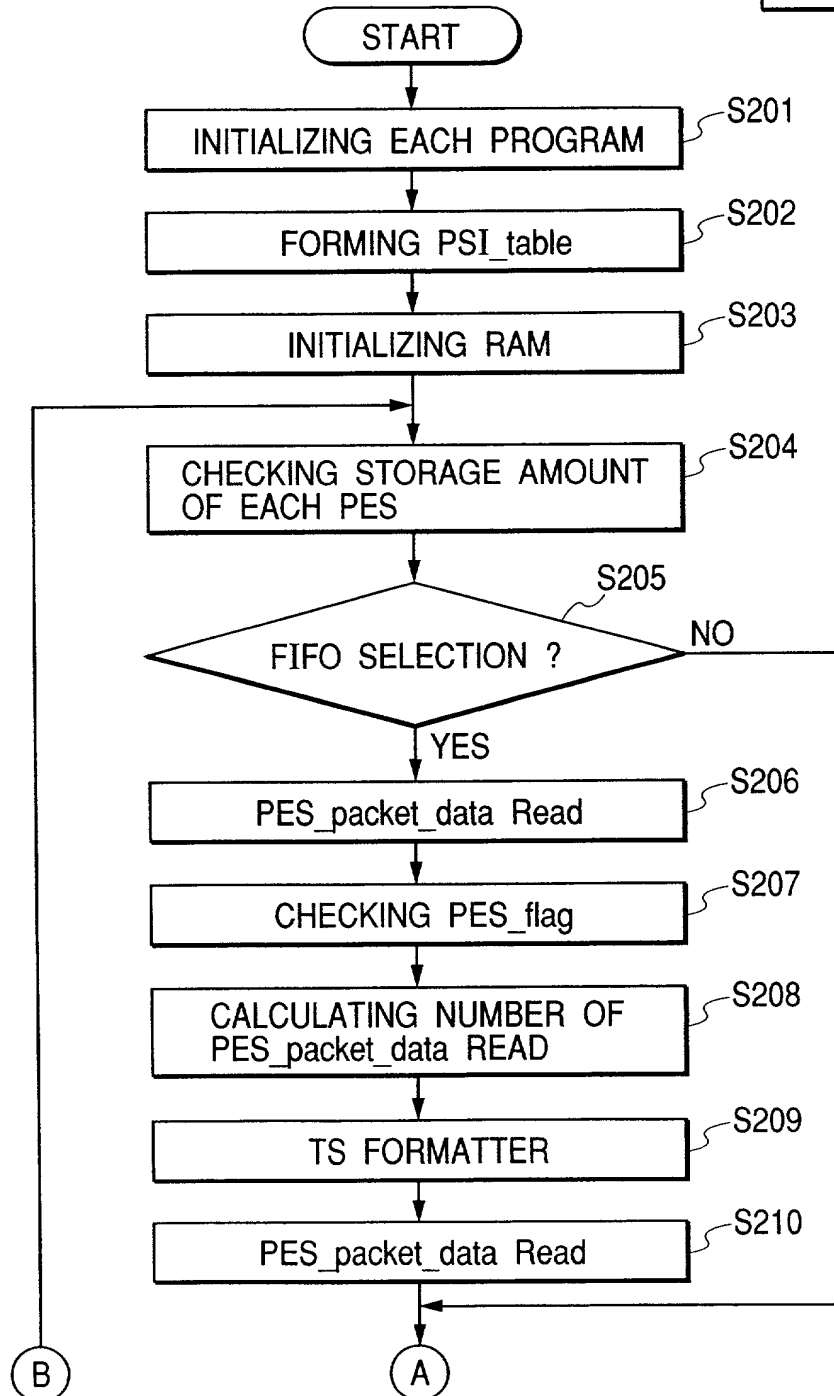


FIG. 9B

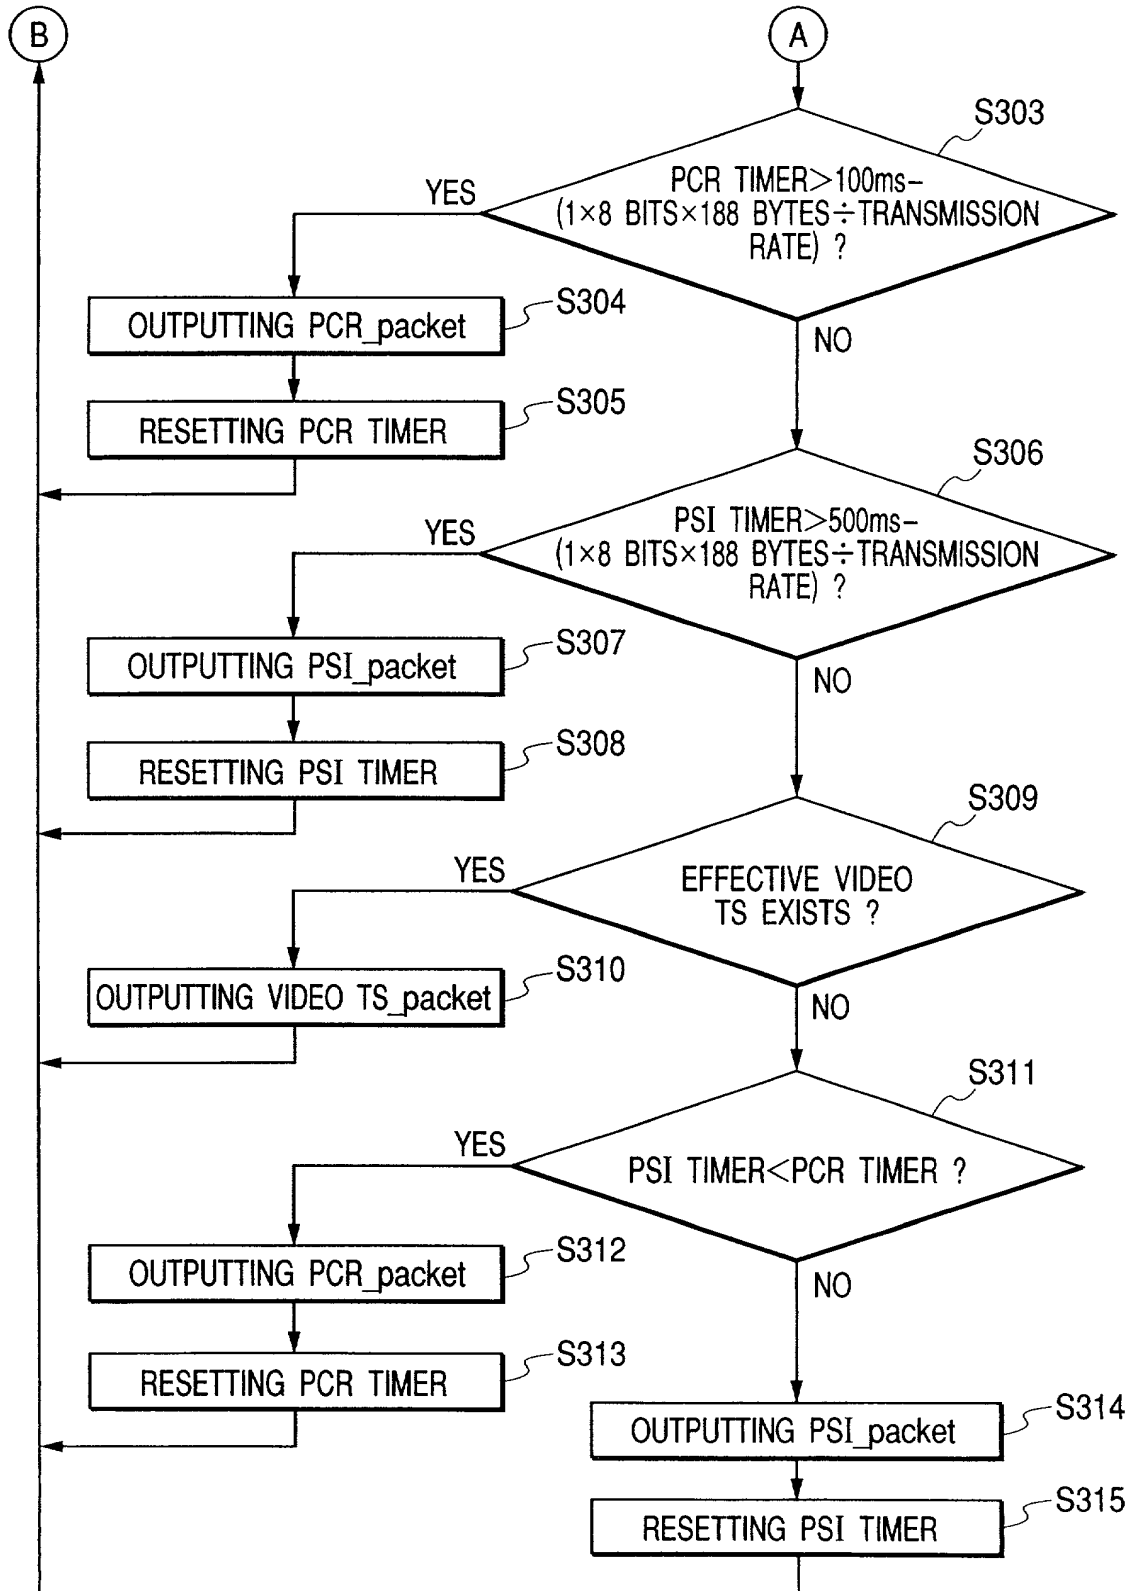

**COMBINED DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION**  
(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**INFORMATION PROCESSING APPARATUS AND METHOD**

the specification of which ☒ is attached hereto ☐ was filed on \_\_\_\_\_  
as United States Application No. or PCT International Application No. \_\_\_\_\_  
and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed

Country	Application No.	Filed (Day/Mo./Yr.)	(Yes/No) Priority Claimed
Japan	11-070849	March 16, 1999	Yes
Japan	11-154154	June 1, 1999	Yes

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application

Application No.	Filed (Day/Mo./Yr.)	Status (Patented, Pending, Abandoned)
-----------------	---------------------	--

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number

**FITZPATRICK, CELLA, HARPER & SCINTO**  
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor KATSUMI KARASAWA

Inventor's signature \_\_\_\_\_

Date \_\_\_\_\_ Citizen/Subject of JAPAN

Residence 14-18, Toyosatodai 2-chome, Utsunomiya-shi  
Tochigi-ken, Japan

Post Office Address c/o Canon Kabushiki Kaisha,  
30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan